





A

B

C

D

E

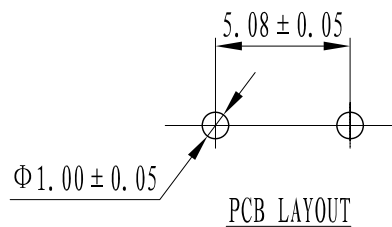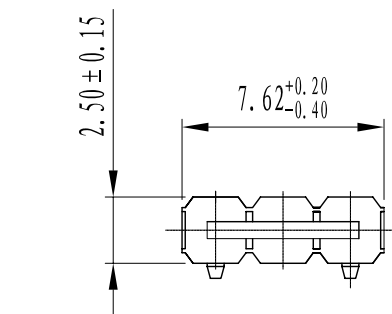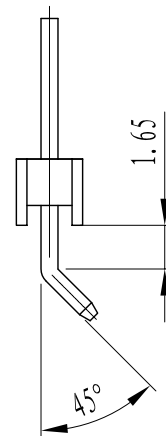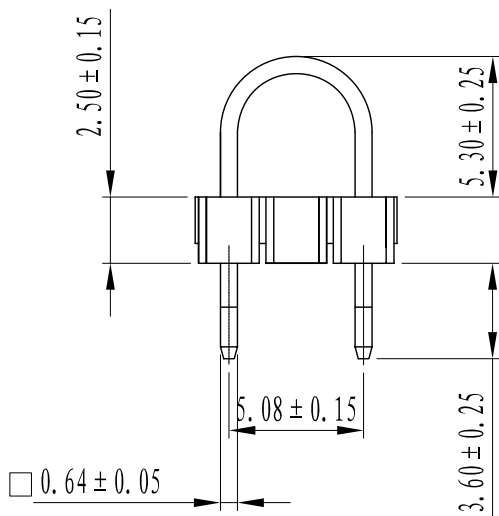

UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

PERFORMANCE CHARACTERISTICS:

1.MAIN BODY PART MATERIAL

INSULATOR: PBT BLACK UL94V-0

CONTACT TERMINAL: BRASS, GOLD FLASH OVER 1.27μm Ni

2.ELECTRICAL REQUIREMENTS

CURRENT RATING: 3 A

VOLTAGE RATING: 550V AC

CONTACT RESISTANCE: ≤20 mΩ

INSULATION RESISTANCE: ≥1000 MΩ

WITHSTANDING VOLTAGE: 1000 V_{r.m.s.}, 1mA, 60s

3.ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: -40℃ ~ +105℃

4.PACKING & STORING

METHOD OF PACKING: PLASTIC BAG

STORING CONDITION: TEMPERATURE OF -10℃ ~ +40℃
BELOW 80% RELATIVE HUMIDITY

5.STYLE OF INSTALLATION: SOLDER PCB INSTALLATION

6.TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO

RoHS AGREEMENT: CONTENT

TECHNICS: LEAD-FREE

					5.08mm PITCH U-SHAPE PIN HEADER	wrj-b241			
						PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A0		
DRAW		CHXIE2008.04.01				SHEET 1		OF 1	
CHK		Alan 2008.04.03				b241-021-01-1 深圳市威尔杰电子有限公司			
MAN		Alan 2008.04.03							
STD		Cindy 2008.04.03							
APP		Jiang 2008.04.11							