
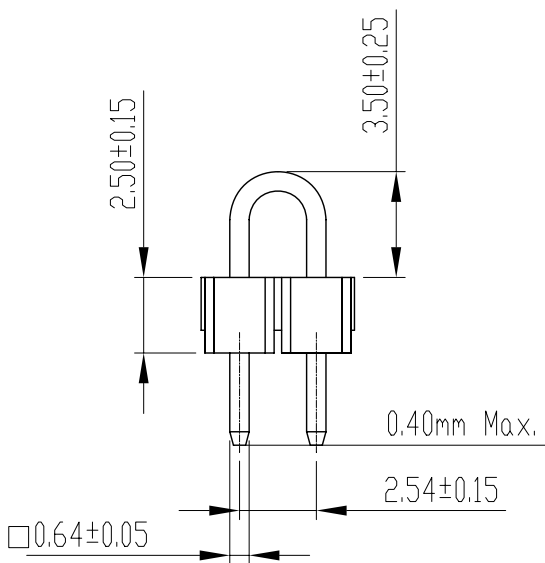
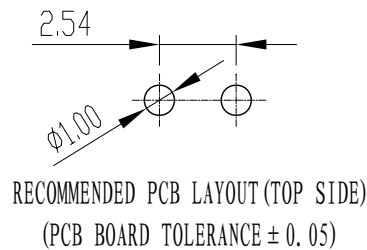


2°MAX SWAY
(ANY DIRECTION)

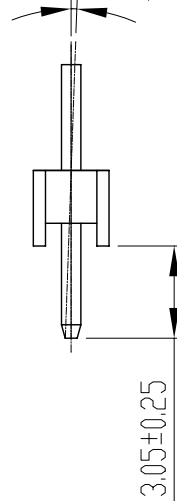

Performance characteristics:

1.Main body part material

Insulator: PPS Black UL94V-0

Contact terminal: Brass ,Gold flash over 1.27~ 3μm Ni.

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥1000 MΩ

Withstanding voltage: AC 500 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40℃~105℃

4.Packing & storing

Method of packing: plastic bag

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

5.Style of installation: solder pcb installation

6.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

					2.54mm pitch U-sharpe pin header	wrj-b241			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW	Tim 2009.11.10								
CHK									
MAN									
STD					b241-024-11-2	Sheet 1		1 of 1	
APP						深圳市威尔杰电子有限公司			