
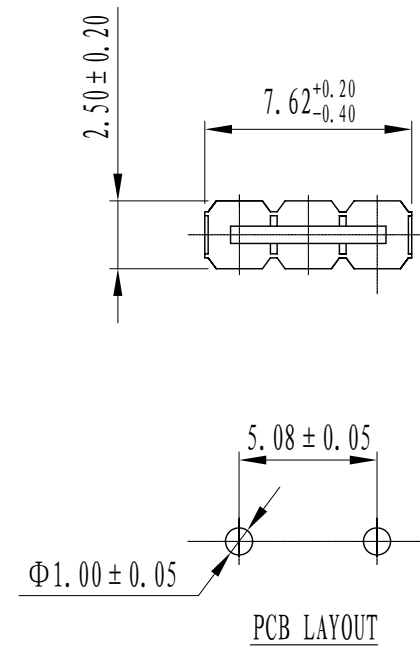
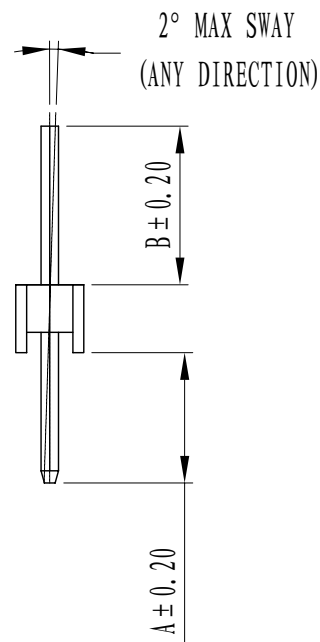


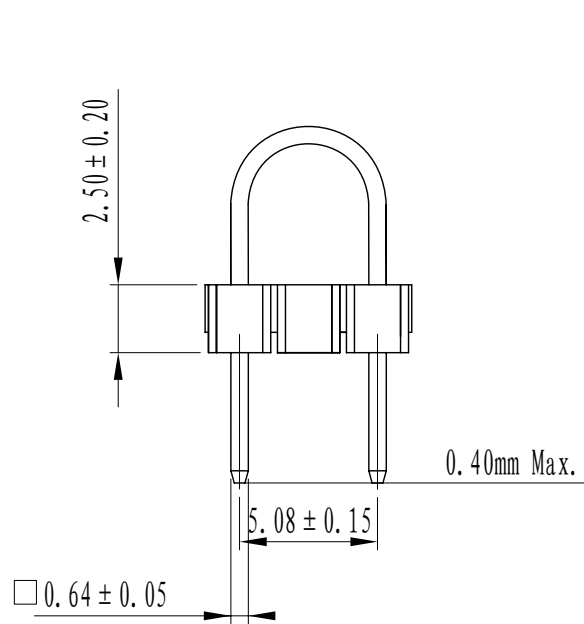

The Table of The Seventh Code:


specification		
Definition		
Code	A	B
2	3.50	5.84
3	4.80	5.84

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

PERFORMANCE CHARACTERISTICS:

- 1.MAIN BODY PART MATERIAL
INSULATOR: PBT BLACK UL94V-0
CONTACT TERMINAL: BRASS, Au 0.25μm OVER 1.27μm Ni
- 2.ELECTRICAL REQUIREMENTS
CURRENT RATING: 3 A
CONTACT RESISTANCE: ≤20 mΩ
INSULATION RESISTANCE: ≥5000 MΩ
WITHSTANDING VOLTAGE: 1000 Vr.m.s, 1mA, 60s
- 3.ENVIRONMENT SPECIFICATION
WORKING TEMPERATURE: -55℃ ~ +125℃
- 4.PACKING & STORING
METHOD OF PACKING: PLASTIC BAG
STORING CONDITION: TEMPERATURE OF -10℃ ~ +40℃
BELOW 80% RELATIVE HUMIDITY
- 5.STYLE OF INSTALLATION; SOLDER PCB INSTALLATION
- 6.TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO
RoHS AGREEMENT: CONTENT

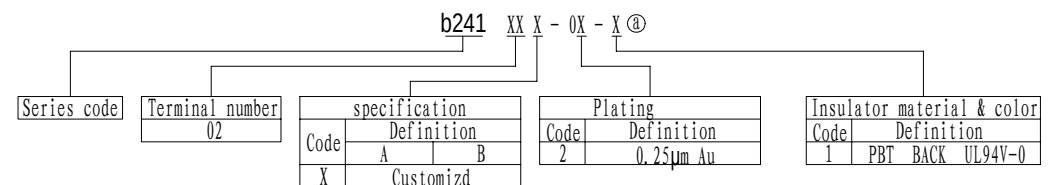

					5.08mm PITCH U-SHAPE PIN HEADER	wrj-b241			
④	1		L. Tang	2009.3.13					
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	SCALE
DRAW	CHXIE2008.07.22						A1		
CHK									
MAN									
STD									
APP					b241-02X-02-1	Sheet 1		of 1	
						深圳市威尔杰电子有限公司			

④	1	L.Tang	2009.3.13
Mark	NO.	File NO.	Signature Date
DRAW	CHX1E2008.07.22		
CHK			
MAN			
STD			
APP			

5.08mm PITCH U-SHAPE PIN HEADER			
b241-02X-02-1			