REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013-05-17

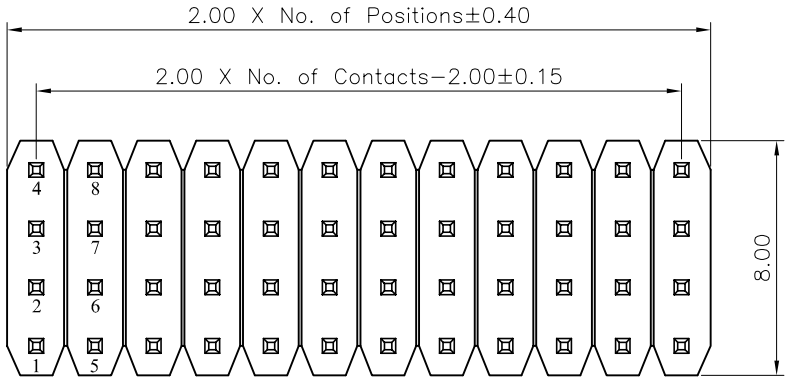

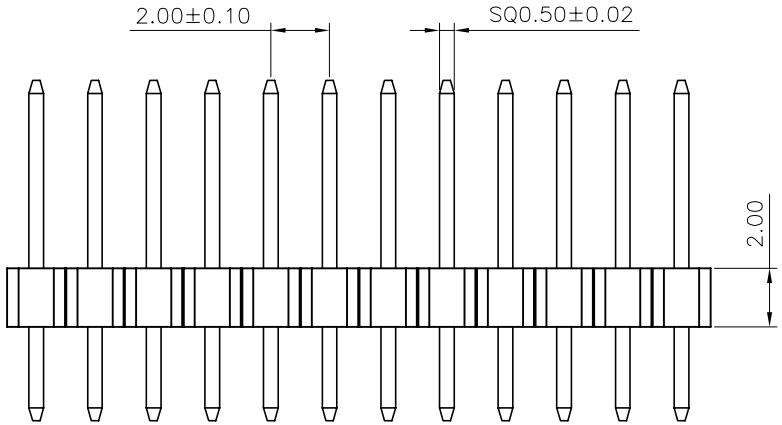

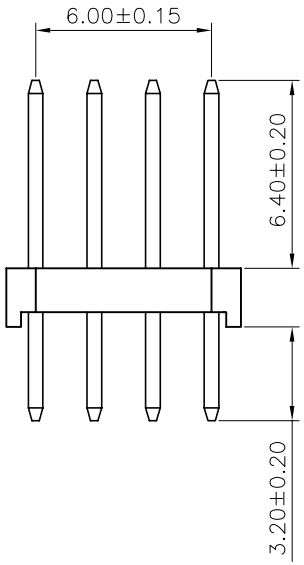

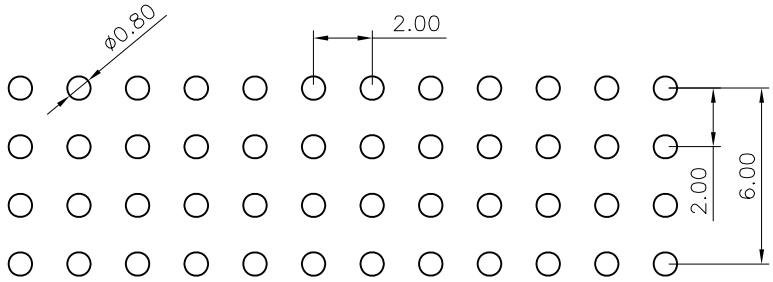

P.C.B LAYOUT

Technical Data

Material:
Contact Material: Brass
Contact plating:Au or Sn Over 50μ" Ni
Insulator Material:Black Polyester UL94V-0
Standard:PBT+30%G.F

Electrical:
Current rating:2.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage:1000V AC/minute

Mechanical:
Mechanical life cycle:min.200
Operaing temperatures: -40°C to+105°C
Soldering temperature: +220°C max(PBT)

深圳市威尔杰电子有限公司

TOLERANCE		PROJECTON		TITLE: 四排直针 PH2.0 塑高2.0 L11.6 PA6.4 PC3.2 PBT G1			
ANGLE	±5°	DATE :	2013-05-17				
X.XXX	±0.10	DRAWN :	samtek	PART NO: b290-xxx-0A-1			
X.XX	±0.20	CHECKED :	samtek	DRAWING NO:			
X.X	±0.30	APPROVED :	Fuqianshan	REV: A0	UNIT: mm	SCALE: 4:1	SIZE: A4
X.	±0.50						