
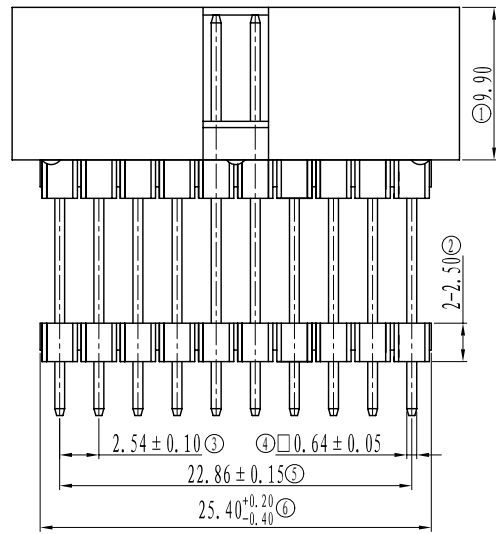


Recommended PCB LAYOUT
(PCB TOLERANCE ± 0.05)

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

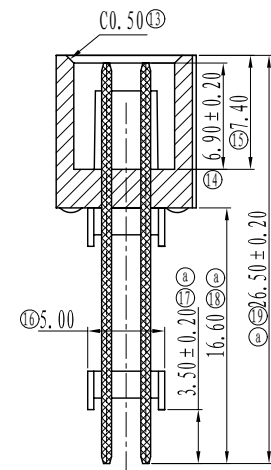

- Performance characteristics:
- 1.Main body part material
Insulator: LCP Black UL94V-0
Contact terminal:Brass,1.27μm Ni under plated,
outer plating Gold flash
 - 2.Electrical requirements:
Current rating: 3 A
Contact resistance: ≤20 mΩ
Insulation resistance: ≥5000 MΩ
Withstanding voltage: 1000 V AC
 - 3.Mechanical requirements
Retention: ≥10N/pin
 - 4.Environment specification
Working temperature: -55℃ ~+125℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260±5℃,10s
 - 5.Packing & storing
Method of packing:PE Bag, outer box
Storing condition: temperature of -10℃ ~+40℃
below 80% relative humidity
 - 6.Style of installation: Solder PCB Instillation
 - 7.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

					2.54 PITCH STACKER HEADER 2X10Pin	wrj-c234			
⑦	3	SN-00002857	Tim Lv	2013.07.16		Projection	Rev.	Weight	Scale
⑧	1	SN-00002650	Tim Lv	2013.05.16			A2		
Mark	NO.	File NO.	Signature	Date					
DRAW		Tim Lv 2013.04.08							
CHK					c234-xxG-xx-x	All Dimensions in mm		Sheet 1 of 1	
MAN									
STD						深圳市威尔杰电子有限公司			
APP									