
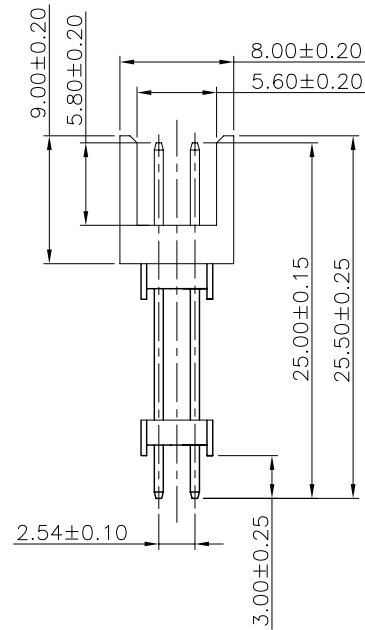



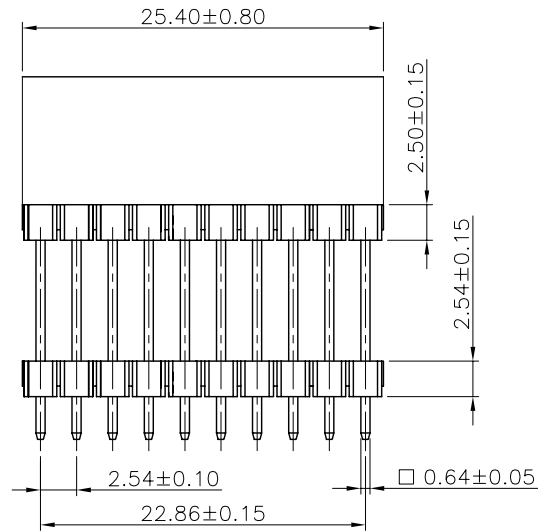

UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

PERFORMANCE CHARACTERISTICS:

1. MAIN BODY PART MATERIAL

INSULATOR: PBT, BLACK, UL94V-0

CONTACT TERMINAL: BRASS, PLATING 0.76μm Au ON CONTACT AREA,
PLATING 3~5μm Sn ON THE SOLDER AREA

2. ELECTRICAL REQUIREMENTS

CURRENT RATING: 3 A

VOLTAGE RATING: 250 V

CONTACT RESISTANCE: ≤ 20 mΩ

INSULATION RESISTANCE: ≥ 1000 MΩ

WITHSTANDING VOLTAGE: 1000 Vr.m.s, 1mA, 60s

3. ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: -25℃ ~ +125℃

4. PACKING & STORING

METHOD OF PACKING: PLASTIC BAG

STORING CONDITION: TEMPERATURE OF -10℃ ~ +40℃
BELOW 80% RELATIVE HUMIDITY

5. STYLE OF INSTALLATION: SOLDER PCB INSTALLATION

6. TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO

RoHS AGREEMENT: CONTENT

TECHNICS: LEAD-FREE

PCB LAYOUT

c234 SERIES 2.54 PITCH
STACKER HEADER

wrj-c234

PROJECTION	REV.	WEIGHT	SCALE
	A0		

SHEET 1 OF 1

c234-xxx-xx-x

深圳市威尔杰电子有限公司

MARK	NO.	FILE NO.	SIGNATURE	DATE
DRAW		J. Y. XU 2007. 6. 2		
CHK		J. G. ZHOU 2007. 6. 2		
MAN		J. G. ZHOU 2007. 6. 2		
STD		Helen Wang 2007. 6. 2		
APP		James He 2007. 6. 3		