
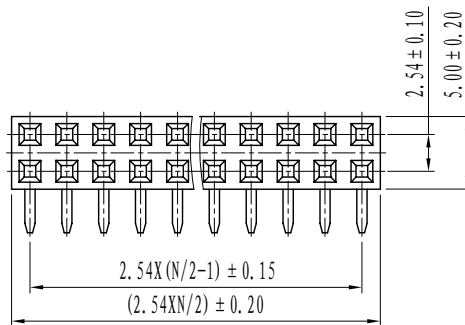
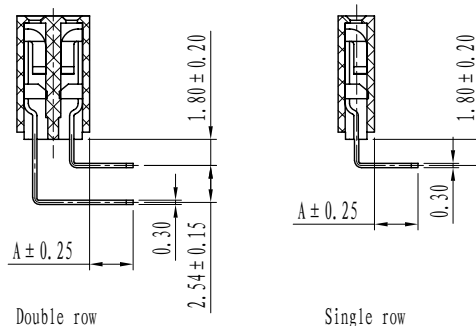
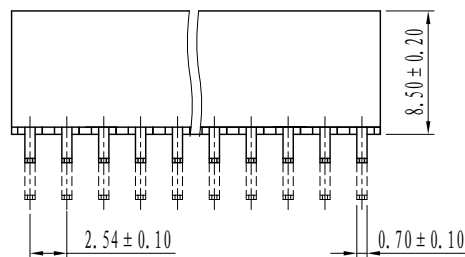
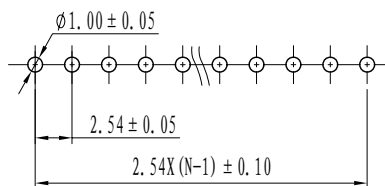


PCB LAYOUT

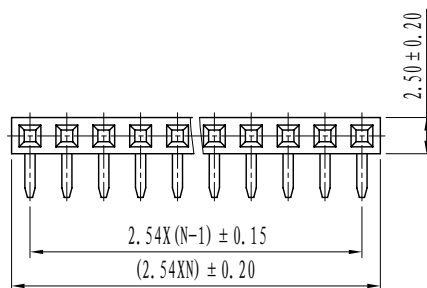

PCB LAYOUT

Double row

Single row

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Insulator:PBT black UL94V-0

Contact terminal: phosphor bronze,1.27μm Ni under plated,
outer plating see spec list

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Mechanical requirements

Insertion force: ≤1.8 N/pin

Extraction force: ≥0.3 N/pin

4.Environment specification

Working temperature: -55℃~+125℃

Humidity: ≤93% at 40℃

Resistance to soldering heat: 245℃±5℃, 10s

5.Packing & storing

Method of packing: tray, outer box

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: solder pcb installation

7.To prevent the pollution of the environment product info
RoHS agreement:content

Series No.		Terminal number		Spec code		Spec code		Plating code		Insulator material & color	
Single row		01~40		Code		Code		Code		Code	
Double row		04~80		Definition		Definition		Definition		Definition	
				A		Single row spring plate		Contacts		PBT BLACK UL94V-0	
				3.00		Double row spring plate		Tail		Customized	
				X				Au GOLD FLASH			
								Au 0.25 μm			
								Au 0.38 μm			
								Au 0.76 μm			
								Au GOLD FLASH			
								Sn			
								Au 0.25 μm			
								Au 0.38 μm			
								Au 0.76 μm			
								Sn			
								Sn			

					2.54mm receptacle single/double row right angle socket	wrj-d263				
							Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0			
DRAW	CHXIE2008.12.11									
CHK										
MAN										
STD					d263-xxx-xx-x	Sheet 1		of 1		
APP						深圳市威尔杰电子有限公司				

深圳市威尔杰电子有限公司