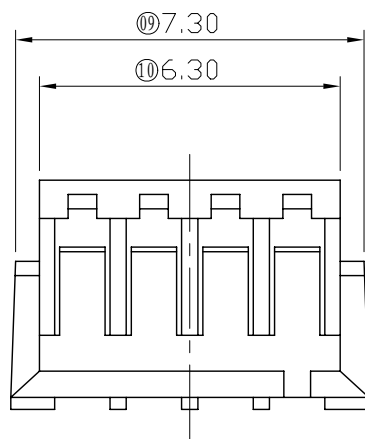
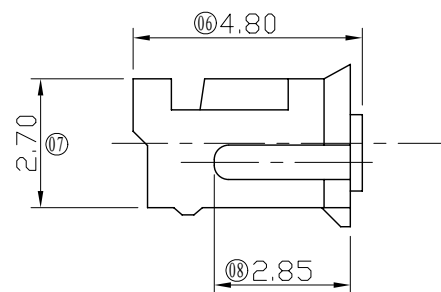
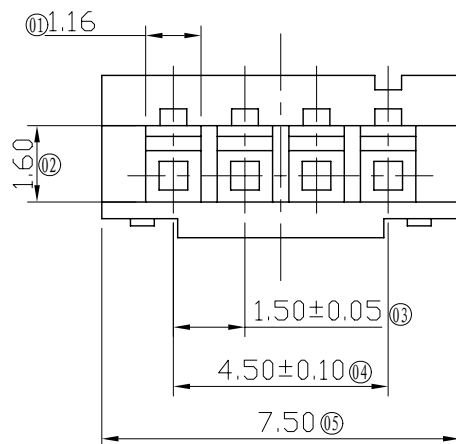


Performance characteristics:

- 1.Main body part material
Insulator: PA66 Nature UL94V-0
- 2.Electrical requirements:
Insulation resistance: $\geq 1000\text{ M}\Omega$
Withstanding voltage: 800 Vr.m.s, 1mA, 60s
- 3.Environment specification
Working temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4.Packing & storing
Method of packing: Plastic bag, inner box, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
- 5.Style of installation: Applicable for crimp cable installation
- 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^{\circ}$
.X	± 0.38	.X °	$\pm 2^{\circ}$
.XX	± 0.25		

					1.50mm Pitch wafer female housing 4 Pin	wrj-e342			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW	An. Cheng 2013-09-24								
CHK					e3421003				
MAN						All Dimensions in mm Sheet 1 of 1			
STD						深圳市威尔杰电子有限公司			
APP									