

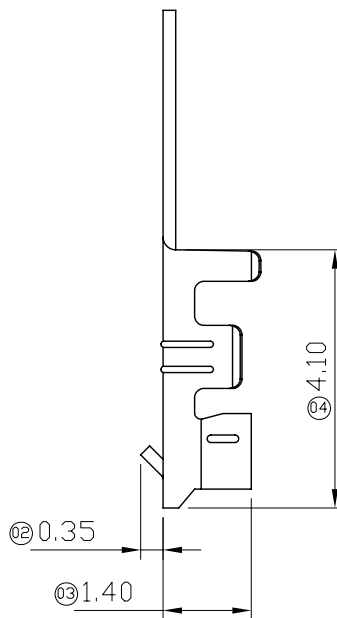
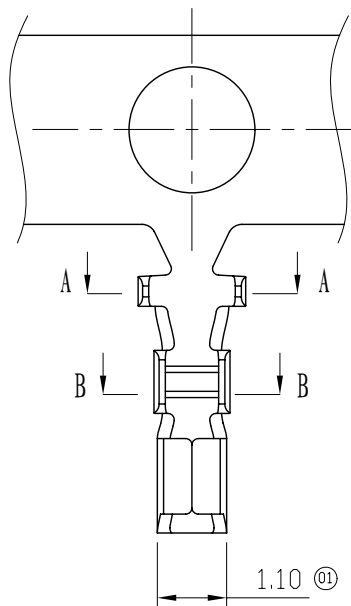


A-A



B-B

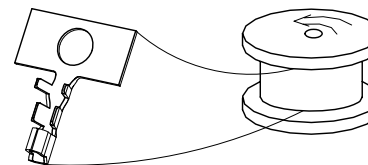

Performance characteristics:

1.Main body part material

Contact terminal: Phosphor bronze, 1.27μm Ni under plated, outer plating Sn 3~5μm .

2.Electrical requirements:

Current rating: 1 A

Voltage rating: 50 V

Contact resistance: ≤20 mΩ

3.Mechanical requirements

Wire gauge: AWG26~32

4.Environment specification

Working temperature: -25℃~+85℃

5.Packing & storing

Method of packing: Paper reel

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: Applicable for crimp cable installation.

7.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					1.50mm Wafer female terminal	wrj-e342			
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale
DRAW		An.Cheng	2013.09.24				A0		
CHK						All Dimensions in mm			
MAN					e3423001	Sheet 1 of 1			
STD						深圳市威尔杰电子有限公司			
APP									