

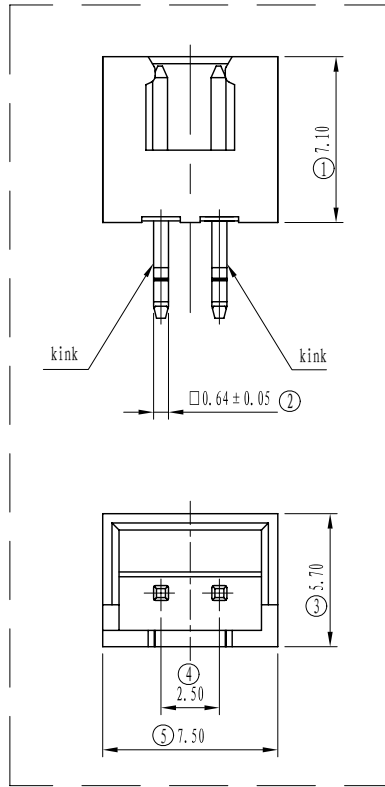






2PIN

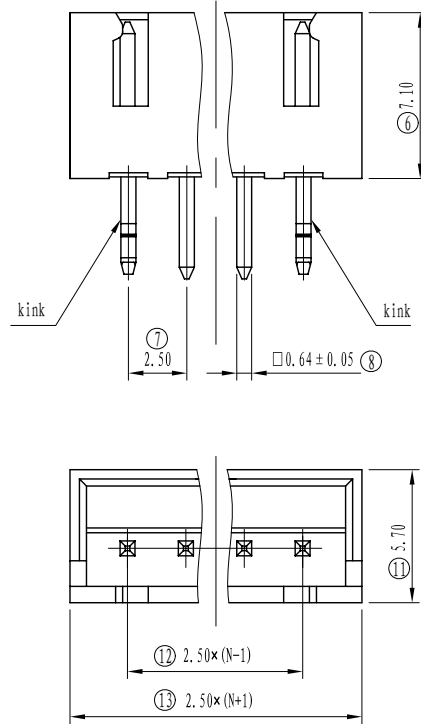

PCB Layout

- Performance characteristics:
1. Main body part material
Insulator: See part number rule
Contact terminal: Brass, 1.27μm Ni under plated,
outer plating see part number rule
 2. Electrical requirements:
Current rating: 3 A
Voltage rating: 250 V
Contact resistance: ≤10 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
 3. Environment specification
Working temperature: -25℃ ~+85℃
 4. Packing & storing
Method of packing: Plastic bag, small outer box
Storing condition: Temperature of -10℃ ~+40℃
below 80% relative humidity
 5. Style of installation: Solder PCB installation
 6. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

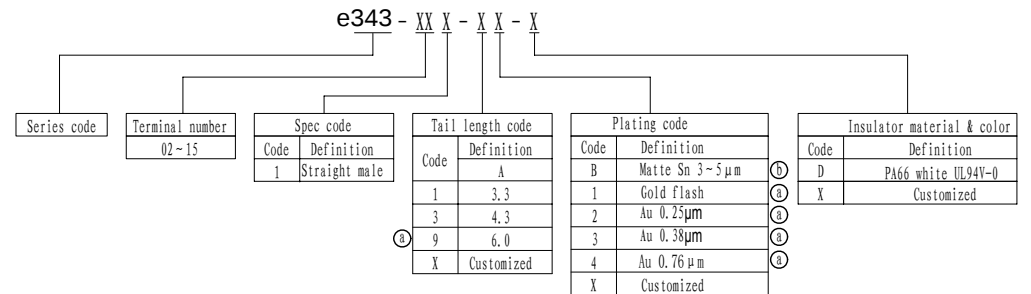

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	SN-00000484	An. Cheng	2011.04.23
③	5	SN-00000650	An. Cheng	2010.7.16
Mark	NO.	File NO.	Signature	Date
DRAW		J. A	2009-02-28	
CHK				
MAN				
STD				
APP				

2.50mm Pitch wafer
straight male

e343-xxx-xx-x

wrj-e343

Projection	Rev.	Weight	Scale
	A2		
All Dimensions in mm		Sheet 1 of 1	
深圳市威尔杰电子有限公司			