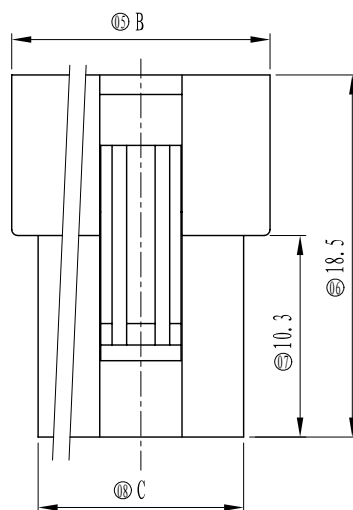
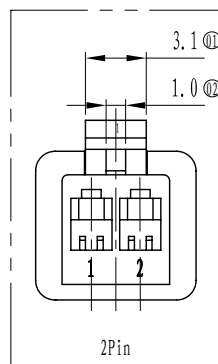
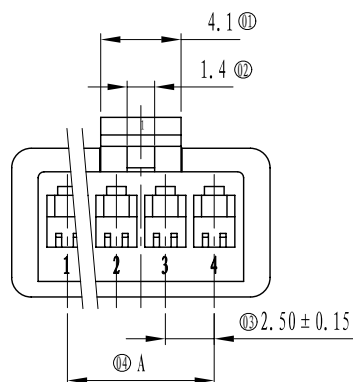


② Performance characteristics:

1. Main body part material
Insulator: PA66, Black UL94V-0
2. Electrical requirements:
Current rating: 3 A
Voltage rating: 250 V
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

⑥ 3.Environment specification

Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. Packing & storing

Number of packing: 1200pcs/bag

Method of packing: Plastic bag, inner box, outer box

Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity

5. Style of installation: Applicable for crimp

cable installation

6.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

Part No.	Circuit	A	B	C	D
e3431083	02	2.50	8.2	5.5	5.7
e3431044	03	5.00	10.7	8.0	8.2
e3431084	04	7.50	13.2	10.5	10.7

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

					2.50mm Pitch wafer male housing	wrj-e343			
③	1	SN-00003561	An. Cheng	2014.04.18		Projection	Rev.	Weight	Scale
④	1	SN-00002911	An. Cheng	2013.07.31			A2		
Mark	NO.	File NO.	Signature	Date					
DRAW		J. A 2009-02-28			e3431083\44\84	All Dimensions in mm		Sheet 1 of 1	
CHK						深圳市威尔杰电子有限公司			
MAN									
STD									
APP									