




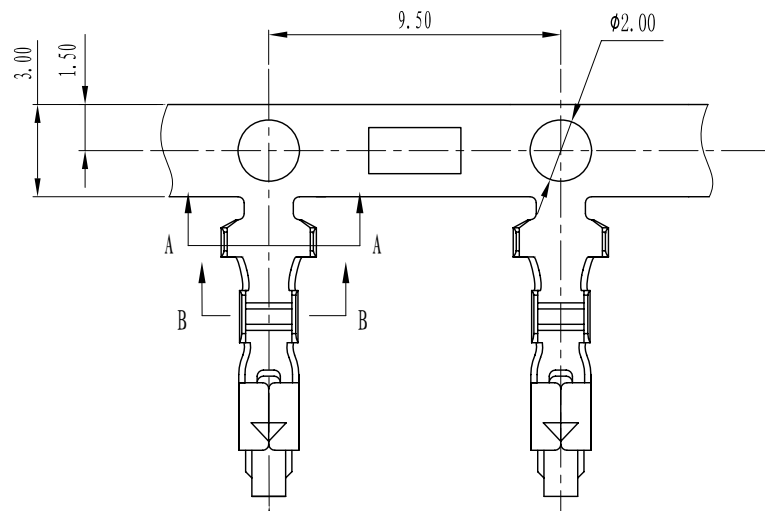


C VIEW





A-A



B-B



C VIEW

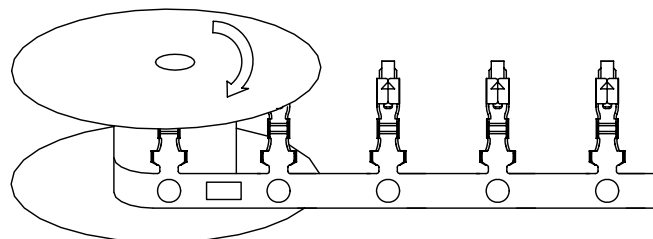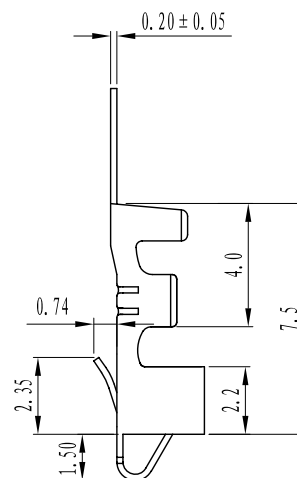

Packing draw

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X °	± 2°
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Contact terminal: Brass, 1.27μm Ni under
plated, outer plating Sn3~5μm

2.Electrical requirements:

Current rating: 3 A

Voltage rating: 250 V

Contact resistance: ≤10 mΩ

3.Mechanical requirements

Insertion force: ≤15 N/pin(Use 0.64mm square pin)

Extraction force: ≥0.5 N/pin(Use 0.64mm square pin)

Wire gauge: AWG22~28

4.Environment specification

Working temperature: -40℃~+105℃

5.Packing & storing

Number of packing: 3500pcs/reel


Method of packing: Paper reel

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: Applicable for crimp
cable installation

7.To prevent the pollution of the environment product info
RoHS agreement: Content

e343 - X-XXX

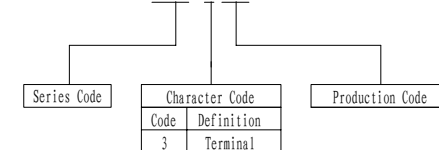

③	1	SN-0003561	An.Cheng	2014.04.18
Mark	NO.	File NO.	Signature	Date
DRAW		J.A	2009.02.03	
CHK				
MAN				
STD				
APP				

2.50mm Wafer female terminal

e3433003

wrj-e343

Projection	Rev.	Weight	Scale
	A1		
Sheet 1		1 of 1	

深圳市威尔杰电子有限公司