

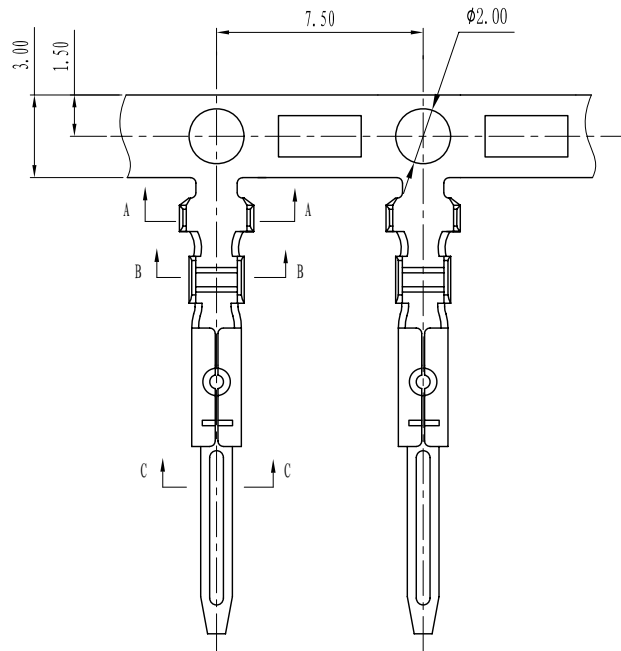



A-A



B-B



C-C

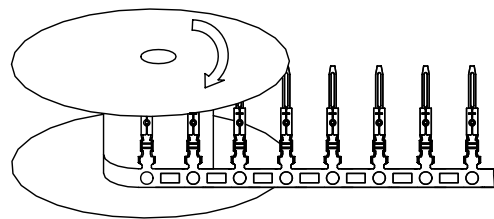

Packing draw

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X °	± 2°
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Contact terminal: Phosphor bronze, 1.27μm Ni under plated, outer plating Sn3~5μm

2.Electrical requirements:

Current rating: 3 A

Voltage rating: 250 V

Contact resistance: ≤10 mΩ

3.Mechanical requirements

Wire gauge: AWG22~28

③ 4.Environment specification

Working temperature: -40℃ ~ +105℃

5.Packing & storing

Number of packing: 5000pcs/reel


Method of packing: Paper reel

Storing condition: Temperature of -10℃ ~ +40℃
below 80% relative humidity

6.Style of installation: Applicable for crimp
cable installation

7.To prevent the pollution of the environment product info
RoHS agreement: Content

e343- X-XXX

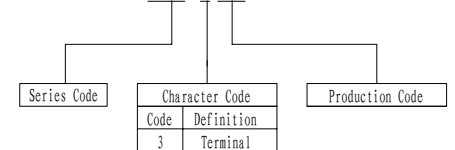

					2.50mm Wafer male terminal	wrj-e343			
③	1	SN-0003561	An.Cheng	2014.04.18		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW J.A 2009.02.03									
CHK									
MAN									
STD					e3433004	Sheet 1		1 of 1	
APP						深圳市威尔杰电子有限公司			