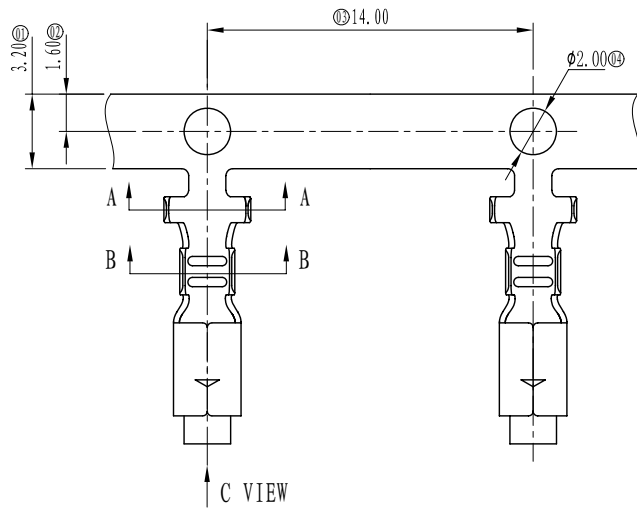


Performance characteristics:

1. Main body part material

Contact terminal: Brass, 1.27μm Ni under plated,
outer plating Sn 3~5μm.

2. Electrical requirements:

Current rating: 7 A

Voltage rating: 250 V

Contact resistance: ≤10 mΩ

3. Mechanical requirements

Insertion force: ≤15 N/pin(Use 1.14mm square pin)

Extraction force: ≥0.5 N/pin(Use 1.14mm square pin)

Wire gauge: AWG18~22

4. Environment specification

Working temperature: -40℃~+105℃

5. Packing & storing


Number of packing: 3000pcs/reel

Method of packing: Paper reel

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6. Style of installation: With the female housing assembly

7. To prevent the pollution of the environment product info RoHS agreement: In line with the european union RoHS.

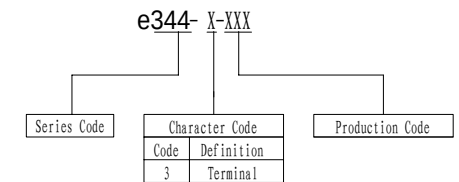

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

④	1	SN-00003375	An. Cheng	2014.02.07
③	1	SN-00003157	An. Cheng	2013.10.28
②	1	SN-00002808	An. Cheng	2013.06.08
Mark	NO.	File NO.	Signature	Date
DRAW		J. A	2009.02.03	
CHK				
MAN				
STD				
APP				

3.96mm Wafer female terminal

e344-x-xxx

wrj-e344			
Projection	Rev.	Weight	Scale
	A4		
All Dimensions in mm		Sheet 1 of 1	
深圳市威尔杰电子有限公司			