
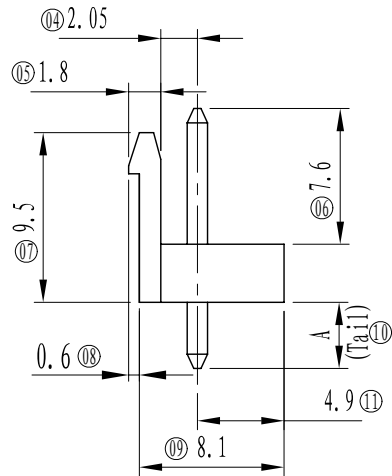
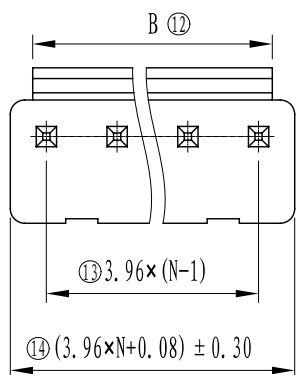
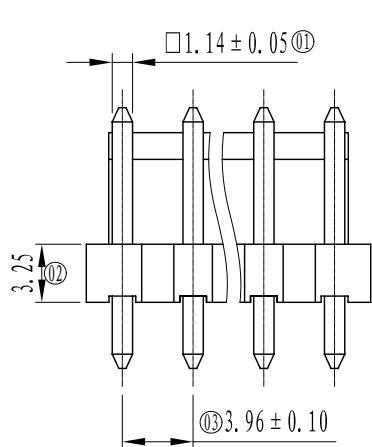


PCB Layout

P/N	B
e344-02x-xx-x	5.45
e344-03x-xx-x	9.41
e344-04x-xx-x	13.37
e344-05x-xx-x	17.33
e344-06x-xx-x	21.29
e344-07x-xx-x	25.25
e344-08x-xx-x	29.21
e344-09x-xx-x	33.17
e344-10x-xx-x	37.13
e344-11x-xx-x	41.09
e344-12x-xx-x	45.05

Performance characteristics:

- 1.Main body part material
Insulator: See part number rule
Contact terminal: Brass, 1.27 μ m Ni under plated,
outer plating see part number rule
- 2.Electrical requirements:
Current rating: 7 A
Voltage rating: 250 V
Contact resistance: ≤ 10 m Ω
Insulation resistance: ≥ 1000 M Ω
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
- 3.Environment specification
Working temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C
- 4.Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: Temperature of -10 $^{\circ}$ C ~ +40 $^{\circ}$ C
below 80% relative humidity
- 5.Style of installation: Solder PCB installation
- 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

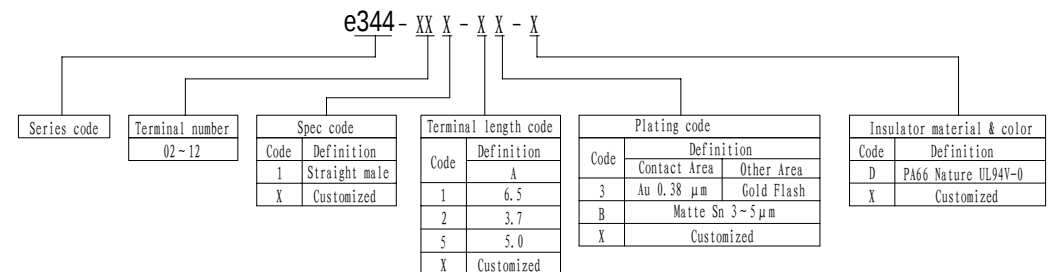

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date	3.96mm Pitch wafer straight male	wrj-e344			
DRAW						Projection	Rev.	Weight	Scale
CHK							B0		
MAN						All Dimensions in mm			
STD					e344-xxx-xx-x	Sheet 1 of 1			
APP						深圳市威尔杰电子有限公司			