


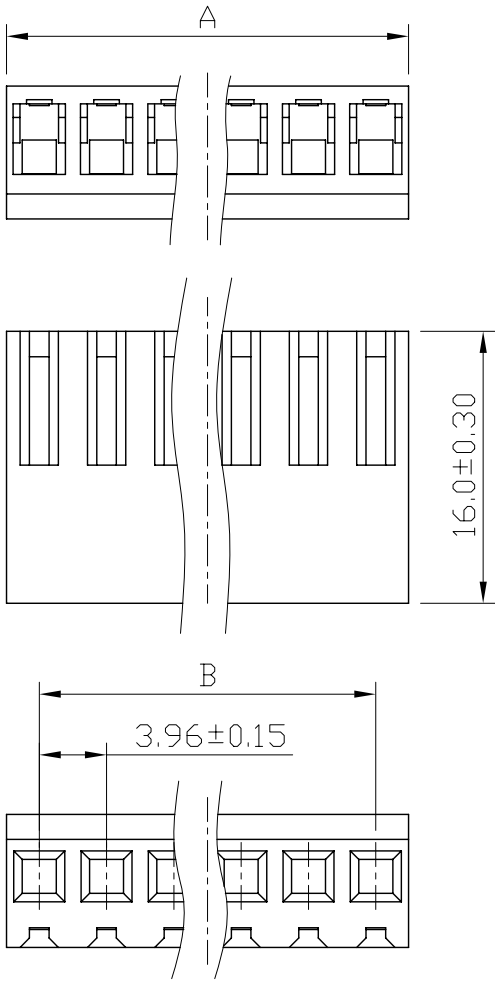

Size table:

P/N	Pin number	A	B
3	e3441003	11.78	7.92
6	e3441006	23.66	19.80

- Performance characteristics:
- 1.Main body part material
Insulator: PA66 nature UL94V-0
 - 2.Electrical requirements:
Current rating: 7 A
Voltage rating: 250 V
Insulation resistance: $\geq 1000\text{ M}\Omega$
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
 - 3.Environment specification
Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 - 4.Packing & storing
Method of packing: Plastic bag, inner box, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
 - 5.Style of installation: Applicable for crimp
cable installation
 - 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^{\circ}$
.X	± 0.38	.X °	$\pm 2^{\circ}$
.XX	± 0.25		

					3.96mm Pitch wafer female housing	wrj-e344				
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale	
DRAW	An.Cheng 2011.10.28						A0			
CHK					e3441002-e3441012					
MAN						All Dimensions in mm		Sheet 1 of 1		
STD						深圳市威尔杰电子有限公司				
APP										