
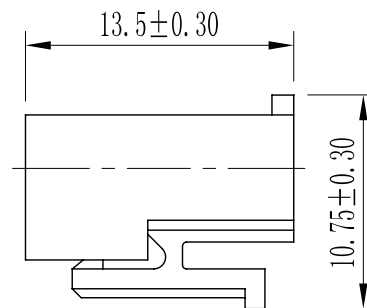
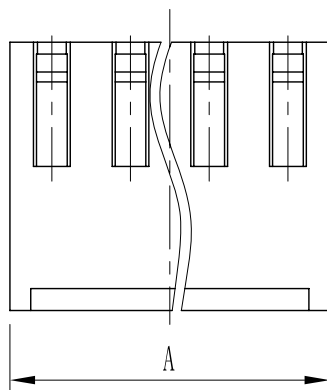


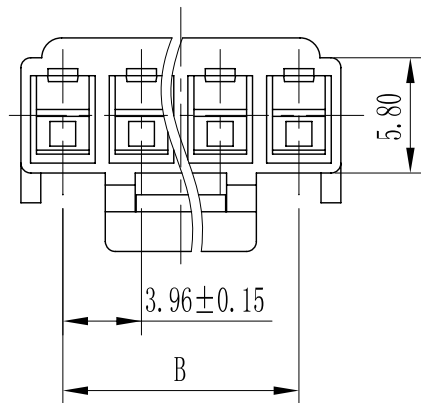

- Performance characteristics:
- 1.Main body part material
Insulator: PA66 white UL94V-0
 - 2.Electrical requirements:
Current rating: 7 A
Voltage rating: 250 V
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
 - 3.Environment specification
④ Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 - 4.Packing & storing
Method of packing: Plastic bag, inner box, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
 - 5.Style of installation: Applicable for crimp
cable installation
 - 6.To prevent the pollution of the environment product info
RoHS agreement: Content

Size table:

P/N	Pin number	A	B
e344-1012	2	8.15	3.96
e344-1013	3	12.11	7.92
e344-1014	4	16.07	11.88
e344-1015	5	20.03	15.84
e344-1016	6	23.99	19.80
e344-1017	7	27.95	23.76
e344-1018	8	31.91	27.72
e344-1019	9	36.00	31.68
e344-1020	10	39.96	35.64
e344-1021	11	43.92	39.60
e344-1022	12	47.88	43.56

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^{\circ}$
.X	± 0.38	.X °	$\pm 2^{\circ}$
.XX	± 0.25		

					3.96mm Pitch wafer female housing	wrj-e344			
④	1	SN-00000556	Stab	2010.6.21		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW		J.A 2009-03-03							
CHK									
MAN									
STD					e3441012-e3441022	Sheet 1		1 of 1	
APP						深圳市威尔杰电子有限公司			