
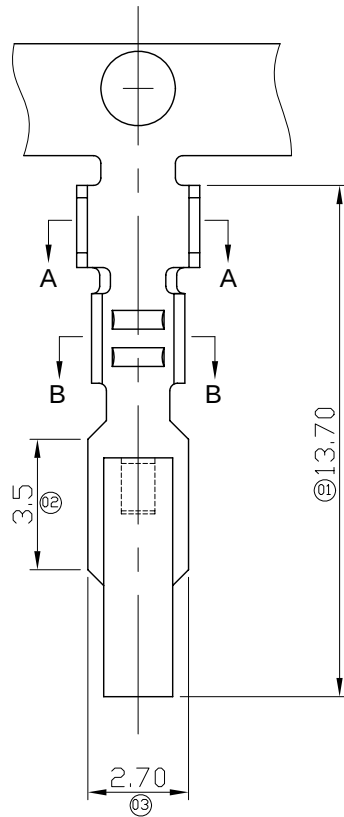



A-A

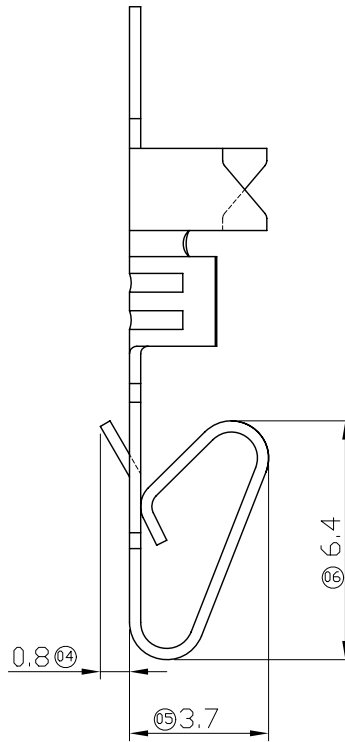

B-B

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X °	± 2°
.XX	± 0.25		

Ⓐ Performance characteristics:

1.Main body part material

Contact terminal: Brass, 1.27μm Ni under plated,
outer plating Sn 3~5μm.

2.Electrical requirements:

Current rating: 7 A

Voltage rating: 250 V

Contact resistance: ≤10 mΩ

3.Mechanical requirements

Wire gauge: AWG18~22

4.Environment specification

Working temperature: -40℃~+105℃

5.Packing & storing

Method of packing: Paper reel

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: Applicable for crimp cable installation.

7.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

					3.96mm Wafer female terminal	wrj-e344					
Ⓐ	1	SN-00003375	An. Cheng	2014.02.07		Projection	Rev.	Weight	Scale		
Mark	NO.	File NO.	Signature	Date			A1				
DRAW		An. Cheng 2013.09.24									
CHK					e3443002	All Dimensions in mm Sheet 1 of 1 深圳市威尔杰电子有限公司					
MAN											
STD											
APP											