

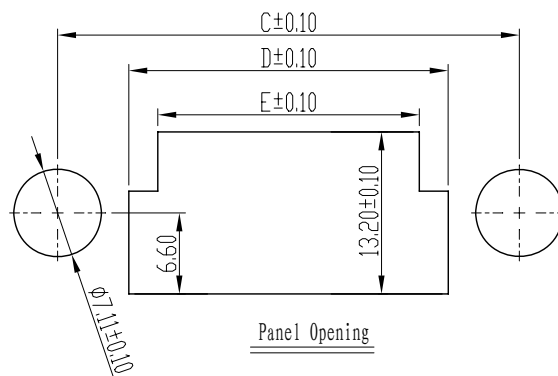
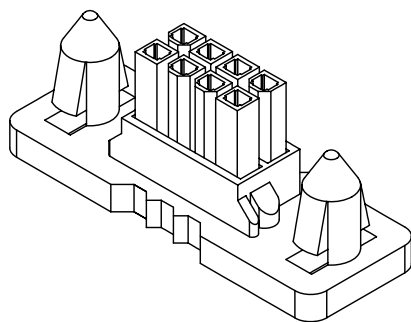
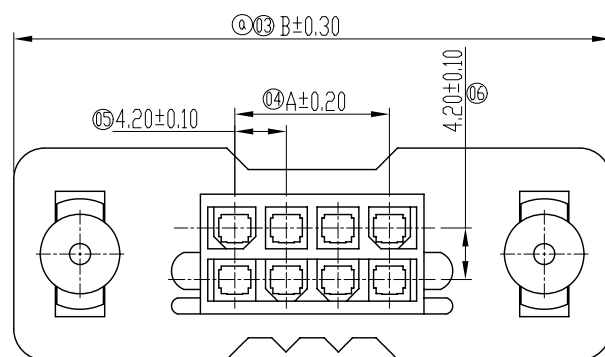


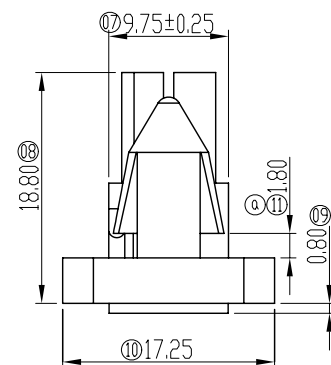

④Performance characteristics:

1. Main body part material
Insulator: PA66 Nature UL94V-2
2. Electrical requirements:
Current rating: 9 A
Voltage rating: 600 V DC
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
3. Environment specification
Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
5. Style of installation: Applicable for Crimp Cable Installation
6. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

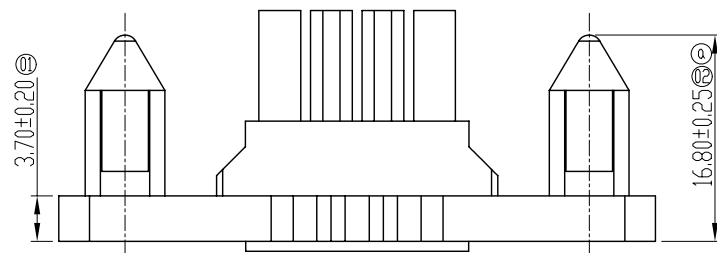

Part No.	Circuit	Dimensions				
		A	B	C	D	E
e3481001	2*7	25.20	60.60	50.20	38.60	33.90
e3481002	2*12	46.20	81.60	71.20	59.60	54.90

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

					4. 20mm PITCH DUAL ROW WITH PANEL MOUNT EARS HOUSING	wrj-e348				
②	4	SN-00002824	An.Cheng	2013.06.08		Projection	Rev.	Weight	Scale	
Mark	NO.	File NO.	Signature				A1			
DRAW		An.Cheng 2013-04-11					All Dimensions in mm			Sheet 1 of 1
CHK							e34810xx 深圳市威尔杰电子有限公司			
MAN										
STD										
APP										