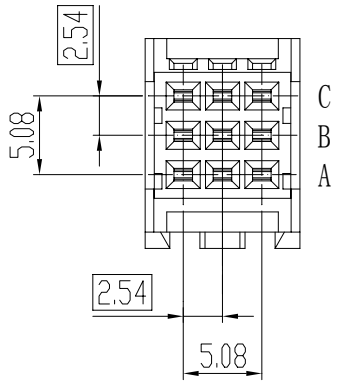
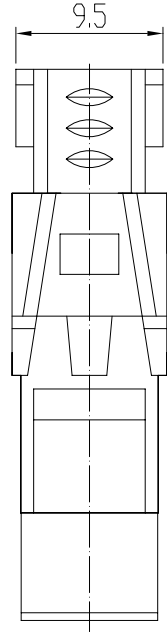
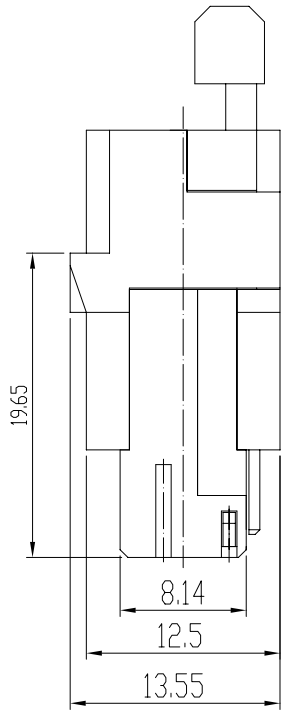
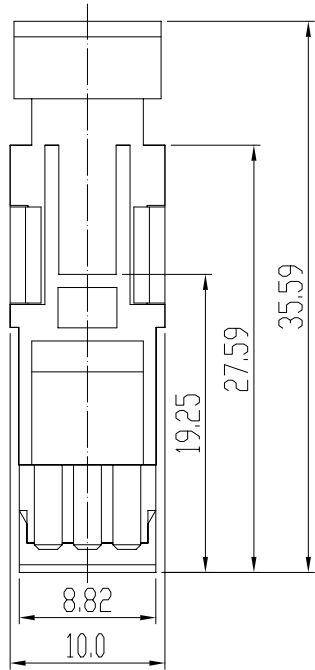


- ④ PERFORMANCE CHARACTERISTICS:
- 1.MAIN BODY PART MATERIAL
INSULATOR: PBT GREY UL94V-0
CONTACT TERMINAL: PHOSPHOR BRONZE
CRUST: PBT BLACK UL94V-0
 - 2.ELECTRICAL REQUIREMENTS
CURRENT RATING: 1 A
VOLTAGE RATING: 250 V
CONTACT RESISTANCE: $\leq 20\text{ m}\Omega$
INSULATION RESISTANCE: $\geq 1000\text{ M}\Omega$
WITHSTANDING VOLTAGE: 1000 Vr.m.s, 1mA, 60s
 - 3.MECHANICAL REQUIREMENTS
INSERTION FORCE: $\leq 1\text{N/pin}$
EXTRACTION FORCE: $\geq 0.2\text{N/pin}$
WIRE GRUGE: AWG24/26,AWG28/30
 - 4.ENVIRONMENT SPECIFICATION
WORKING TEMPERATURE: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - 5.APPLICABLE STANDARD: DIN41612
 - 6.PACKING & STORING
METHOD OF PACKING: TRAY, INNER BOX, OUTER BOX
STORING CONDITION: TEMPERATURE OF $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
BELOW 80% RELATIVE HUMIDITY
 - 7.STYLE OF INSTALLATION: IDC INSTALLATION
 - 8.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

g810-303-x3-x

SERIES CODE		孔位代码		3*3	
WIRE GAUGE		PLATING CODE		TERMINAL CODE	
CODE	DEFINITION	CODE	DEFINITION	CODE	DEFINITION
1	线规为AWG24/26	3	CONTACT PLATING	1	ALL FULL
2	线规为AWG28/30		TAIL PLATING	④ 2	A+C FULL
				X	Customized

⑩ UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

					3X3 IDC CONN.	wrj-810			
⑤	1	SN-00000687	刘胜军	2010.8.2					
⑧	4		LAWRENCE	2007.9.15					
MARK	NO.	FILE NO.	SIGNATURE	DATE					
DRAW	HOWN.WANG		2004.7.12						
CHK					g810-303-x3-x		A2		
MAN									
STD									
APP									

深圳市威尔杰电子有限公司