
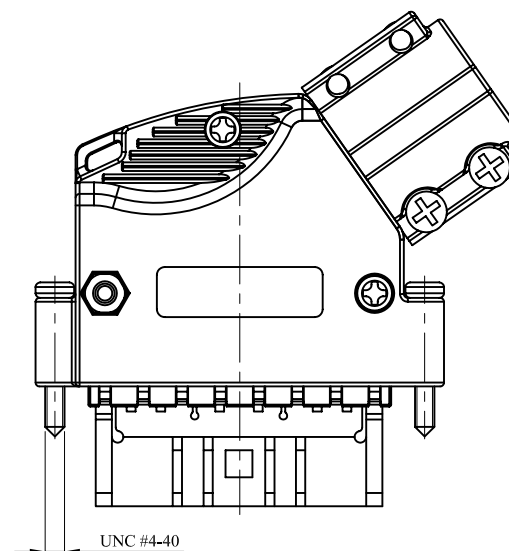
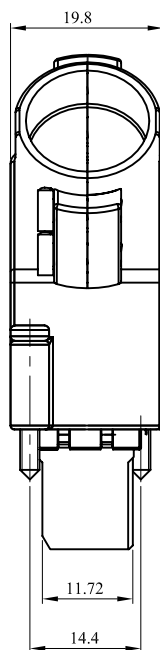
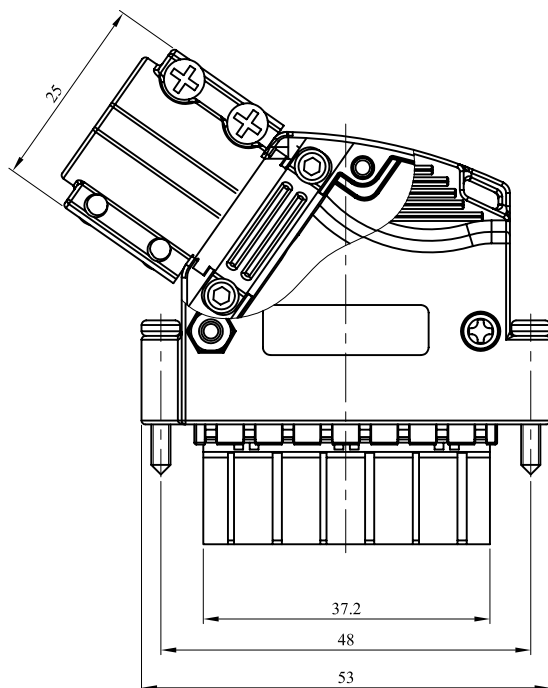


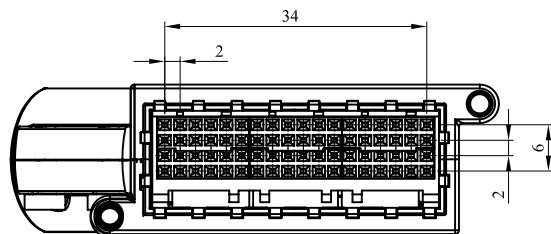

Notes:

1.Material and Plating

Contact: Phosphor Bronze

Cover: Zinc Alloy

Insulator: Thermoplastic, UL94V-0, Color: Grey

2.Electrical

Current Rating: 1A

Contact Resistance: 20mΩ (max)

Insulation Resistance: 1000MΩ (min)

Dielectric Voltage: 1000Vr.m.s

3.Mechanical

Insertion Force: 0.75N/Pin(Max)

Withdraw Force: 0.15N/Pin(Min)

4.Temperature: -55° C~+125° C

g811-418-XX-1

Plating

Code	Contacts plating
2	CLASS I
3	CLASS II
4	CLASS III

Wire Gauge

Code	Wire gauge
1	AWG24/26
2	AWG28/30

4 Lines

18 Holes

UNC #4-40

MARK	NO.	FILE NO.	SIGNATURE	DATE
DRAW		hown-wang		
CHK				
MAN				
STD				
APP				

4X18 IDC Cable Connector

g811-418-xx-1

wrj-g811

PROJECTION	REV.	WEIGHT	SCALE
	A0		
SHEET	1	OF	1

深圳市威尔杰电子有限公司