

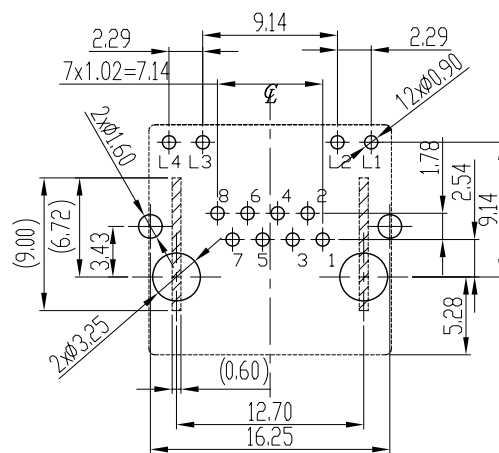
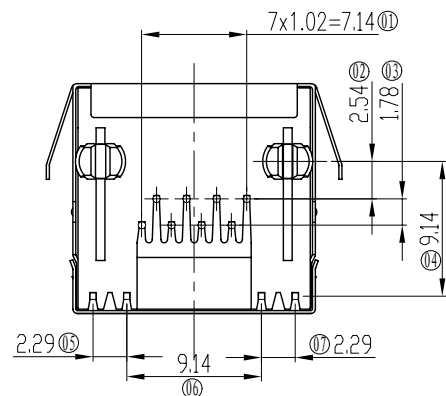


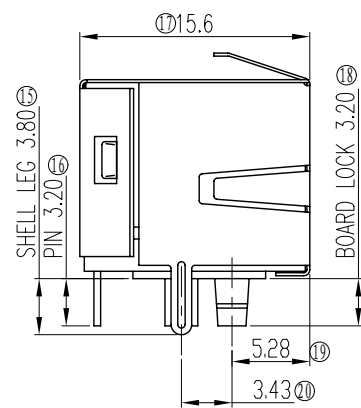


RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05

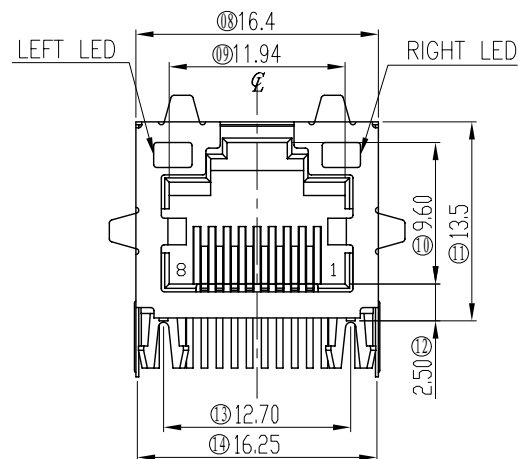

LEFT LED:
L4 + YELLOW —  — L3

RIGHT LED:
L2 + GREEN —  — L1

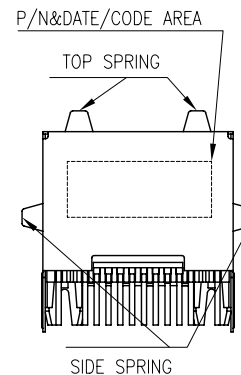

Performance characteristics:

1.Main body part material

- 1.1 Contact: Phos-bronze, 1.27 μm Min. Ni under plated,
outer plating see part number rule
- 1.2 Plastic: PBT black UL94V-0
- 1.3 Shield: SUS201; Plating: Ni 0.75 μm Min
- 1.4 LED: Lens type: Diffusion; Colour: Green, Yellow

2. Mechanical requirements

Operating life: ≥ 750 cycle

3. Electrical requirements

- 3.1 Current rating: 1.5 A
3.2 Voltage rating: 150 V
3.3 Contact resistance: ≤ 20 m Ω
3.4 Insulation resistance: 1000 M Ω , 500V DC
3.5 Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

4. Environment specification

Working temperature: $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$

5. Packing & storing

- 5.1 Method of packing: Tray, inner box
5.2 Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity

6. Style of installation: PCB soldering installation

- 7.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS

h605 - X X X - X X - X

Series code	Port number	Terminal number	LED Definition	Type code	Plating code			Insulator material & color	
	Code Definition	Code Definition	Code Definition	Code Definition	Code	Definition		Code	Definition
	1 1*1	8 8pcs/port	0 Without LED	0 Undefined		Contact plating	Tail plating	1 PBT Black UL94V-0	
			1 L=Yellow, R=Green		1	Gold Flash		X Customized	
					8	Au0.76 μm	Sn3 μm Min		
					X	Customized			

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

					RJ45 Connector 1*1 With Shield	wrj-h605			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			B0		
DRAW	An. Cheng 2013.11.27								
CHK									
MAN									
STD					h605-18x-xx-x	All Dimensions in mm		Sheet 1 of 1	
APP						深圳市威尔杰电子有限公司			