



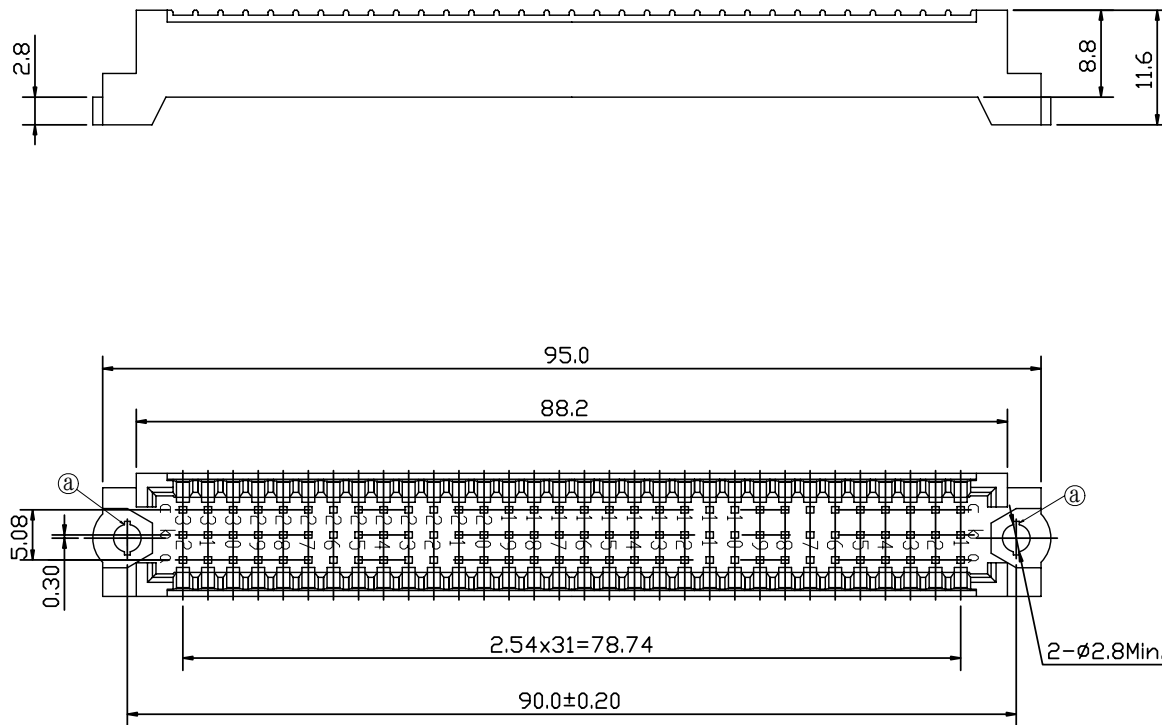

- PERFORMANCE CHARACTERISTICS;
- 1.MAIN BODY PART MATERIAL
INSULATOR: PBT GREY UL94V-0
 - 2.ELECTRICAL REQUIREMENTS
INSULATION RESISTANCE: >1000 MΩ
 - 3.ENVIRONMENT SPECIFICATION
WORKING TEMPERATURE: -55℃ ~+125℃
 - 4.APPLICABLE STANDARD: DIN41612
 - 5.PACKING & STORING
NUMBER OF PACKING: 100PCS/BOX
METHOD OF PACKING: BOX, OUTER BOX
STORING CONDITION: TEMPERATURE OF -10℃ ~+40℃
BELOW 80% RELATIVE HUMIDITY
 - 6.STYLE OF INSTALLATION: RIVET INSTALLATION
 - 7.TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO
RoHS AGREEMENT: CONTENT
TECHNICS: LEAD-FREE



UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					SHROUD/3X32PIN/STANDARD TYPE	wrj-j800			
②	2		LAWRENCE	2008.6.18		PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A4		
DRAW		LAWRENCE 2007.9.11							
CHK		Alan 2008.6.20							
MAN		Alan 2008.6.20							
STD		Cindy 2008.6.20			j800-332-00-T	SHEET		1 OF 1	
APP		Jiang 2008.6.21				深圳市威尔杰电子有限公司			