
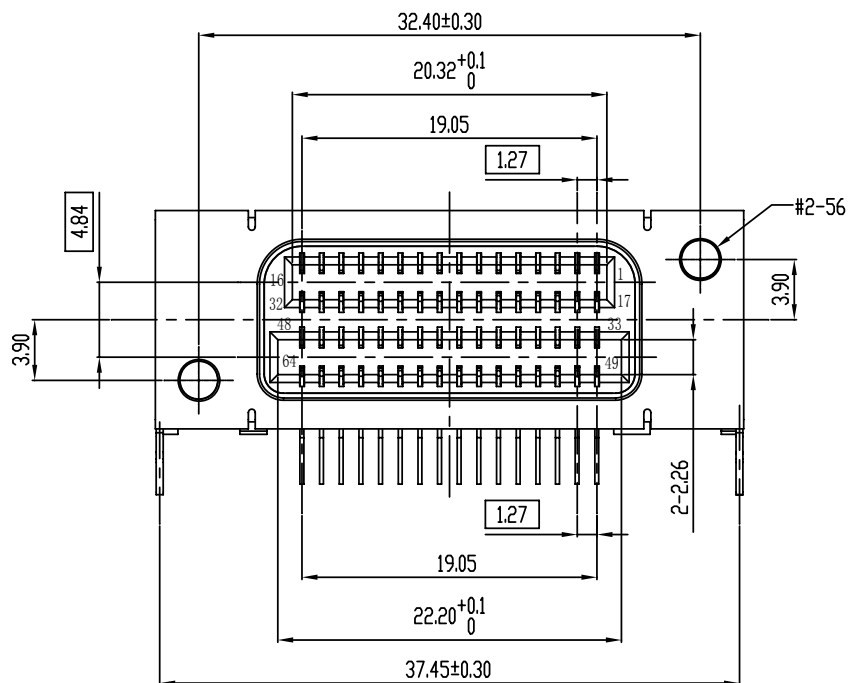
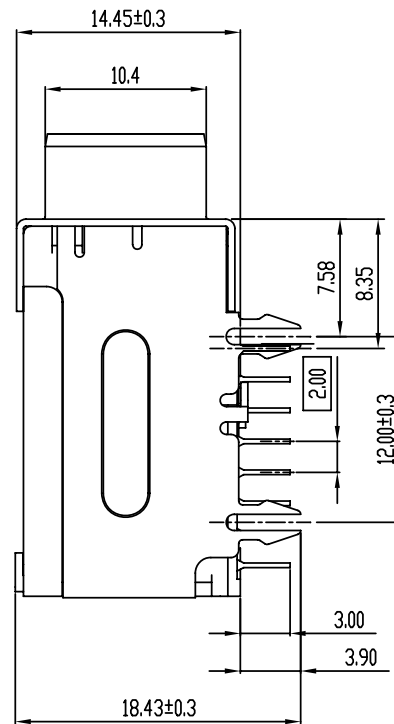


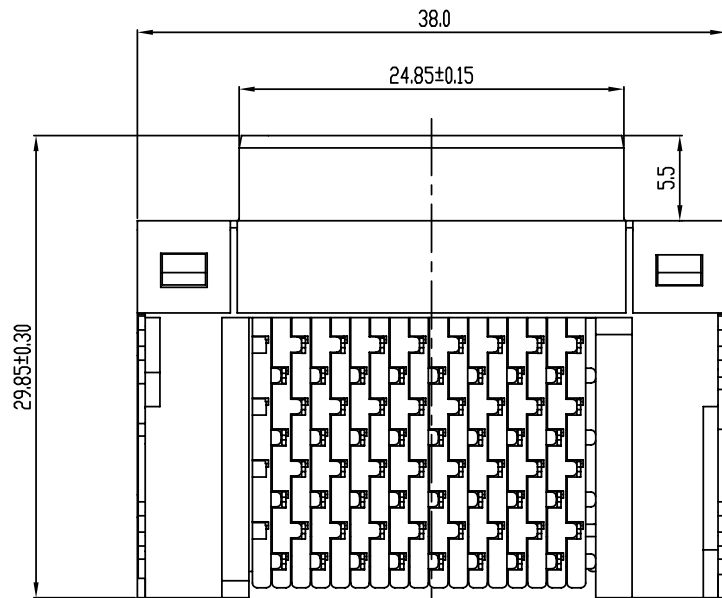

PERFORMANCE CHARACTERISTICS:

1. MAIN BODY PART MATERIAL

INSULATOR: LCP BLACK UL94V-0

CONTACT TERMINAL: PHOSPHOR BRONZE, PLATED SEE LIST

CRUST: SPCC, Ni OUTSIDE PLATED OVER ALL

GROUNDING SHELL : BRASS, Sn OUTSIDE PLATED OVER ALL

2. ELECTRICAL REQUIREMENTS

VOLTAGE RATING: 250V AC

CURRENT RATING: 0.5 A

CONTACT RESISTANCE: $\leq 30 \text{ m}\Omega$

INSULATION RESISTANCE: $\geq 1000 \text{ M}\Omega$

WITHSTANDING VOLTAGE: 1000 Vr.m.s, 1mA, 60s

3. MECHANICAL REQUIREMENTS

MECHANICAL LIFE: 200 CYCLES

4. ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

5. PACKING & STORING

NUMBER OF PACKING: 35PCS/TRAY

METHOD OF PACKING: TRAY, INNER BOX, OUTER BOX

STORING CONDITION: TEMPERATURE OF $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$

BELOW 80% RELATIVE HUMIDITY

6. STYLE OF INSTALLATION; SOLDER PCB INSTALLATION

7. To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	± 0.50	X. °	$\pm 3^{\circ}$
.X	± 0.38	.X °	$\pm 2^{\circ}$
.XX	± 0.25		

					Double Row Double Edge Conn. 64PIN/FEMALE	wrj-m863			
⑧	2		LAWRENCE	2010.01.06		PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A1		
DRAW		LAWRENCE	2007.12.10						
CHK									
MAN									
STD				m863-642-11-1	SHEET		1 OF 1		
APP					深圳市威尔杰电子有限公司				