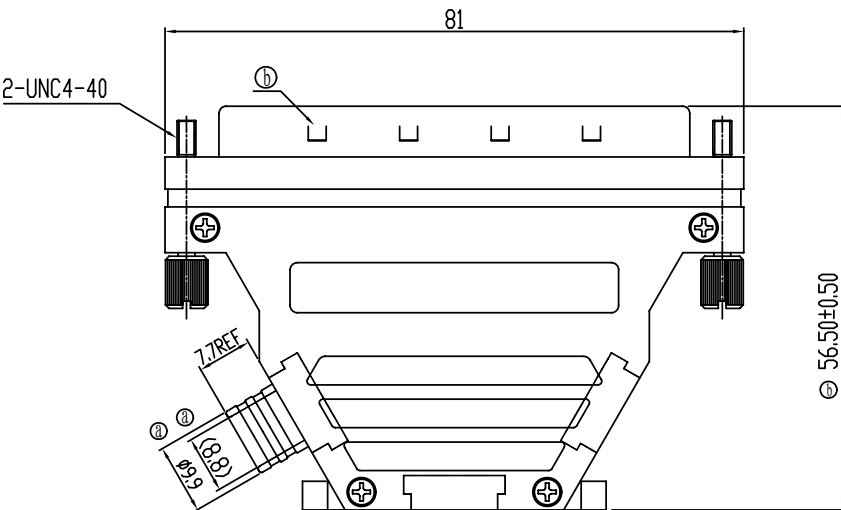


Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X °	± 2°
.XX	± 0.25		

PERFORMANCE CHARACTERISTICS:

1.MAIN BODY PART MATERIAL

INSULATOR: PBT GREY UL94V-0

CONTACT TERMINAL: PHOSPHOR BRONZE Au 0.5µm Min. PLATED
AT MATING AREA, TAIL GOLD FLASH AT TAIL,
Ni1.27µmMin. UNDERPLATED OVER ALL.

SHELL: SPCC TIN PLATED

DIE CAST: ZINC ALLOY NI PLATED

2. ELECTRICAL REQUIREMENTS

CURRENT RATING: 5 A

VOLTAGE RATING: 700 V

CONTACT RESISTANCE: ≤ 35 mΩ

INSULATION RESISTANCE: ≥ 5000 MΩ

WITHSTANDING VOLTAGE: 1200 Vr.m.s, 1mA, 60s

3.MECHANICAL REQUIREMENTS

MECHANICAL LIFE: 200 CYCLES Min.

UNMATING & MATING FORCE : 32lbs. Min.

WIRE GRUGE: AWG24~26 SOLID LINE OR AWG26~28 WRING LINE

4. ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: -55℃ ~ +105℃

5. PACKING & STORING

NUMBER OF PACKING: 1PCS/BAG

METHOD OF PACKING: BAG, INNER BOX, OUTER BOX

STORING CONDITION: TEMPERATURE OF -10℃ ~ +40℃

BELOW 80% RELATIVE HUMIDITY

6. STYLE OF INSTALLATION: IDC INSTALLATION

7.To prevent the pollution of the environment product info

RoHS AGREEMENT: EXEMPT (COMPLIANCE WITH THE EXEMPT

DISCIPLINE OF EUROPEAN UNION, ARTICLE 4(1) OF
DIRECTIVE 2002/95/EC, ANNEX 6)

①	4	SN-00000300	LAWRENCE	2010.4.13	m864 50P	wrj-m864			
②	6		LAWRENCE	2007.6.12		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date	m864-501-15-1	Sheet 1 1 of 1			
DRAW		LSJ.LIU	2007.5.24			深圳市威尔杰电子有限公司			
CHK									
MAN									
STD									
APP									