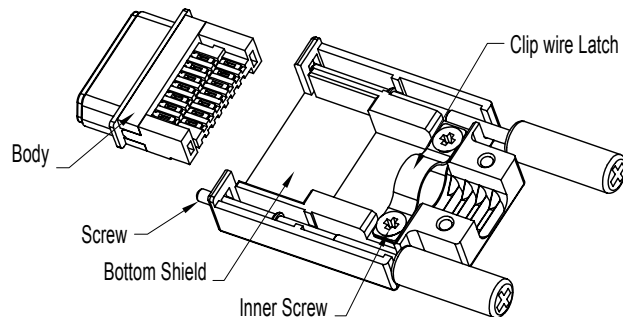
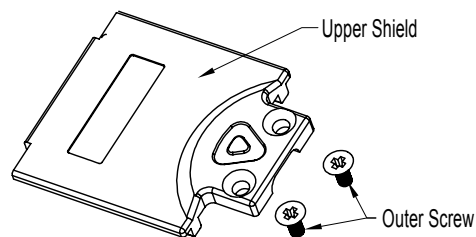


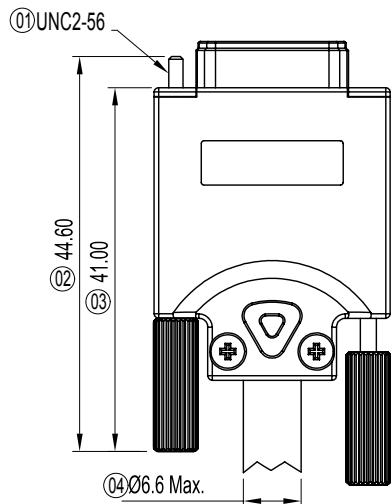


Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

Performance characteristics:

- a 1. Main body part material
 - Insulator: LCP black UL94V-0
 - Contact terminal: phosphor bronze, 1.27 ~ 2 μ m Ni under plated,
 - Contact plating Au 0.76 μ m , Tail plating Sn 3 ~ 5 μ m.
 - Cast Bracket: Zinc Alloy, plating Ni, Salt Spray 48H.
 - Screw: SUS 304
 - Outer/Inner Screw: Steel, plating Zn
 - Clip wire Latch: SUS 301
2. Electrical requirements:
 - Current rating: 0.5 A
 - Voltage rating: 30 V DC
 - Contact resistance: ≤ 50 mΩ
 - Insulation resistance: ≥ 500 MΩ
 - Withstanding voltage: 500 Vr.m.s, 1mA, 60s
3. Mechanical requirements
 - Wire gauge: AWG28 ~ 30
4. Environment specification
 - Working temperature: -55℃ ~ +85℃
5. Packing & storing
 - Method of packing: tray , inner box, outer box
 - Storing condition: temperature of -10℃ ~ +40℃
 - below 80% relative humidity
6. Style of installation: solder cable installation
7. To prevent the pollution of the environment product info
 - RoHS agreement: In line with the european union RoHS.

					0.80mm Pitch 28/Pin Male Connector Solder Cable Type	wrj-m867			
②	1	SN-00002477	An.Cheng	2013.01.04		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW		An.Cheng	2012-09-24						
CHK									
MAN									
STD				m867-281-18-3		All Dimensions in mm		Sheet 1 of 1	
APP						深圳市威尔杰电子有限公司			