
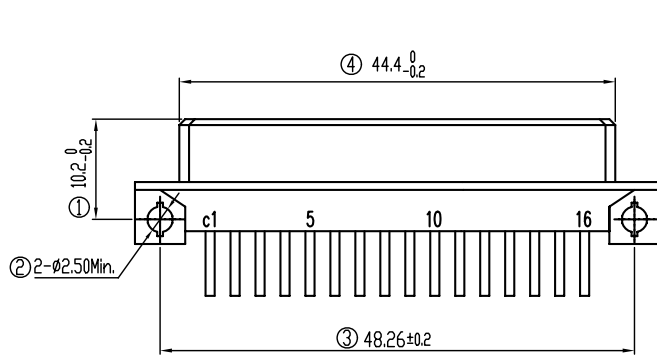


THREE ROWS TAIL

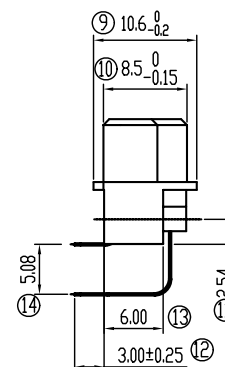

TWO ROWS TAIL

Performance characteristics:

1.Main body part material

Insulator: PBT GREY UL94V-0

Contact terminal: Phosphor bronze, 1.27μm Ni under plated, outer plating see spec list

2. Electrical requirements:

Current rating: 1.5 A (at 20℃)

contact resistance: ≤20 mΩ

insulation resistance: ≥10⁶ MΩ

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3. MECHANICAL REQUIREMENTS

INSERTION FORCE: ≤0.94N/pin

EXTRACTION FORCE: ≥0.15N/pin

4. Environment specification

Working temperature: -55℃~+125℃

5. Applicable standard: DIN41612

6. Packing & storing


Method of packing: Tray, inner box, outer box

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity


6. Style of installation; Solder pcb installation

7. To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

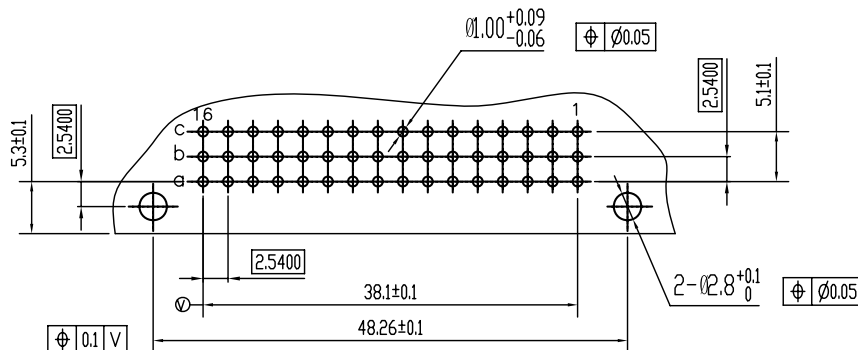

RECOMMENDED PCB LAYOUT

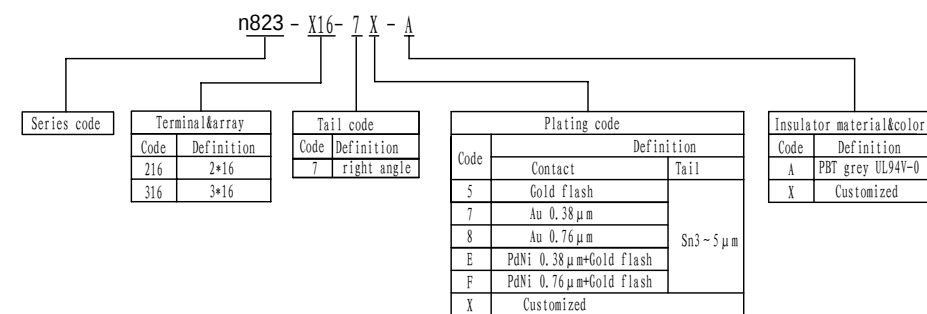

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					wrj-n823			
					Projection	Rev.	Weight	Scale
					A1			
					All Dimensions in mm			
					Sheet 1 of 1			
					深圳市威尔杰电子有限公司			